(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 21 July 2005 (21.07.2005)

PCT

(10) International Publication Number WO 2005/065037 A2

(51) International Patent Classification:

Not classified

(21) International Application Number:

PCT/IL2005/000026

- (22) International Filing Date: 9 January 2005 (09.01.2005)
- (25) Filing Language:

English

(26) Publication Language:


English

(30) Priority Data: 60/534,708

8 January 2004 (08.01.2004)

- (71) Applicant (for all designated States except US): YEDA RESEARCH AND DEVELOPMENT COMPANY LTD. [IL/IL]; At The Weizmann Institute of Science, P.O.Box 95, 76100 Rehovot (IL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): FINKELSTEIN,

- (74) Agent: REINHOLD COHN AND PARTNERS; P.O.B. 4060, 61040 Tel Aviv (IL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,

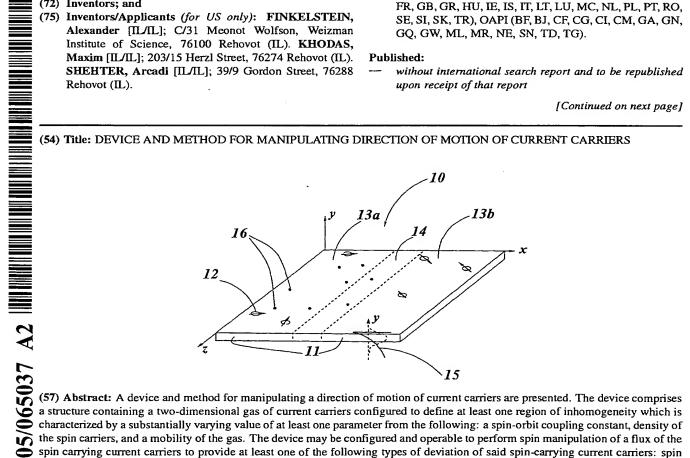

the spin carriers, and a mobility of the gas. The device may be configured and operable to perform spin manipulation of a flux of the spin carrying current carriers to provide at least one of the following types of deviation of said spin-carrying current carriers: spin dependent refraction, spin dependent reflection and spin dependent diffraction on desired deviation angles of a direction of motion of the spin-carrying current carriers being incident on said at least one region of inhomogeneity. The device may also be configured and operable to allow emission of the current carriers from a diffusive region at one side of the region of inhomogeneity to a ballistic region at the opposite side of the region of inhomogeneity to provide the current carriers propagation in multiple directions in the ballistic region with a wide angular range of these directions.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.